

# SOLID T11

## Ideal for:

- Large-format printing, labels, tags
- On-demand printing or batch processing
- Toughest continuous use
- A3 Paper Mill labels
- A3 Auto manufacturing labels

## HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Easy handling of consumables
- USB, Ethernet (10/100 Mbit) as standard
- Laser printer compatible
- SAP with the standard PCL5e emulation
- High printing speed
- Optional IPDS emulation making it the printer of choice for IBM solutions

**MAXIMUM FLEXIBILITY  
FOR SMOOTH PRODUCTION  
AND LOGISTICS PROCESSES**



## SOLID T11

The SOLID T11 is a robust 11-inch thermal printer designed to cope with the toughest continuous demands in production and logistics. It prints fast and efficiently on all common materials, either in high-grade thermal transfer quality or with economical and especially efficient direct thermal printing. The SOLID T11 features impressively high 300dpi resolution. The tremendous performance of the flexible MICROPLEX Controller guarantees a fast first page, making it ideal for exacting print-on-demand requirements.

## Print Engine

<b>Print technology</b>	Thermal transfer/direct thermal harmonic (history controlled flat head technology)
<b>Controller</b>	MPC 5.4 with Intel XScale PXA 255 (400-MHz-RISC-Processor)
<b>Print speed</b>	up to 150 mm/s up to 6 inch/s
<b>Print resolution</b>	300 dpi x 300 dpi
<b>Lifetime print head</b>	Transfer: up to 30.000 m Direct: up to 15.000 m
<b>Power supply</b>	100/240V autoselect
<b>Power consumption</b>	5,6A
<b>Dimensions (WxDxH in mm)</b>	475 x 313 x 319
<b>Weight</b>	26 kg (without options)
<b>Environment temperature</b>	5 - 40°C
<b>Relative humidity</b>	30 - 80 % [rel., non-condensing]
<b>Interfaces</b>	Serial: USB Parallel: IEEE 1284 LAN: Ethernet-Interface 10/100 MBit, bi-directional (TCP/IP)
<b>Memory</b>	RAM: 128 MB Flash: 16 MB

## MPC 5.4 High-End Print-Controller

### Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, AGFA Reno, LN03+, BULL-MP6090, Datamax (FGL), Etimark MP-1220, TEC Bx72, TEC B6xx, LDC, ZPL II, EPL2, UBI Fingerprint, IER Command, Godex EZPL, Diablo 630, IBM Pro-printer, Epson FX-80, MT-600/MT40, IDS, ANSI Genicom, TIFF, HP Designjet, XML (SAP RFID), CUPS Raster

### Optional Emulations

µ-Postscript, CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, IGP-10, Datamax Labelpoint, IPDS, AEA, AFP, RFM (more emulations on request)

### Barcodes

QR Code, EAN 8, 13, 128, add on, 2/5 3-stroke Datalogic, 2/5 3-stroke Matrix, Codabar, PDF 417, Royalbar, Planet, Jetcaps (HP/SAP), Code 39, 128 MSI, UPC A, E, Postnet, KIX, USPS One Code

### Optional Barcodes

USD5, Aztec-Code, UPS-Maxicode, Datamatrix (more barcodes on request)

**Additional functions** Intelligent barcode generation on-the-fly in the printer  
**Format splitting** in several subformats by command

### Optional functions

### Integrated form management

up to 12 MB flash for forms and fonts inside the printer


### Status-Out

gives notice of each correctly printed page via interface



## Printable Media

<b>Size</b>	
Weight	131-300 mm width printable width 266 mm
<b>Paper thickness</b>	max. 0,21 mm
<b>Thermal transfer ribbon</b>	
<b>Core diameter</b>	inch (25.4 mm)
<b>Ribbon length</b>	max. 300 m
<b>Coated side</b>	inside
<b>Ribbon width</b>	max. 273 mm

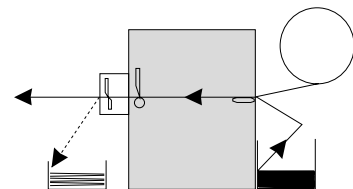

## Paper Path

<b>Input</b>	
continuous	internal from roll, external, e.g. fanfold
<b>Optional</b>	external unwinder
<b>Output</b>	
Single / Job	tear-off
<b>Optional</b>	
Single	cutter
Job	cutter

The brand names referred to are the registered trademarks of the respective companies. All figures and details in italics and highlighted in color are optional. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 08.05.2016

Microplex Printware AG  
Panzerstraße 5 | 26316 Varel | Germany  
phone +49 4451 91 37-0 | fax +49 4451 91 37-49

