

SOLID T8

Ideal for:

- Stickers, labels and tags as well as VDA and Odette labels
- Fast on-demand printing or batch processing
- Toughest continuous use (24/7)
- A5 Pallet labels (wide way leading)

HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Easy handling of consumables
- USB, Ethernet (10/100 Mbit) as standard
- Laser printer compatible
- SAP with the standard PCL5e emulation
- Very high printing speed
- Robust metal case
- Optional IPDS emulation making it the printer of choice for IBM solutions

MAXIMUM FLEXIBILITY FOR SMOOTH PRODUCTION AND LOGISTICS PROCESSES



SOLID T8

The SOLID T8 is a robust 8-inch thermal printer designed to cope with the toughest continuous demands in production and logistics. It prints fast and efficiently on all common materials up to 240 g/m², either in high-grade thermal transfer quality or with economical and especially efficient direct thermal printing. The SOLID T8 features impressively high 300dpi resolution. The tremendous performance of the flexible Microplex Controller guarantees a fast first page, making it ideal for exacting print-on-demand requirements.

Print Engine

Print technology	Thermal transfer/direct thermal harmonic (history-controlled near-edge print head)
Controller	MPC 5.3 with Intel XScale PXA 255 (400-MHz-RISC-Processor)
Print speed	up to 300 mm/s up to 12 inch/s
Print resolution	300 dpi x 300 dpi
Lifetime print head	Transfer: up to 50.000 m
Power supply	100 - 240 VAC, 50/60 Hz
Power consumption	3,2A
Dimensions (WxDxH in mm)	450 x 490 x 305
Weight	26 kg (without options)
Environment temperature	5 - 35°C
Relative humidity	45 - 75 % (rel., non condensing)
Interfaces	Serial: USB, RS232, RS422 Parallel: IEEE 1284 LAN: Ethernet-Interface 10/100 MBit, bi-directional (TCP/IP)
Memory	RAM: 4 MB Flash: 16 MB

MPC 5.3 High-End Print-Controller

Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, AGFA Reno, LN03+, BULL-MP6090, Datamax (FGL), Etimark MP-1220, TEC Bx72, TEC B6xx, LDC, ZPL II, EPL2, UBI Fingerprint, IER Command, Godex EZPL, Diablo 630, IBM Pro-Printer, Epson FX-80, MT-600/MT40, IDS, ANSI Genicom, TIFF, HP Designjet, XML (SAP RFID), CUPS Raster

Optional Emulations

µ-Postscript, CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, IGP-10, Datamax Labelpoint, IPDS, AEA, AFP, RFM (more emulations on request)

Barcodes

QR Code, EAN 8, 13, 128, add on, 2/5 3-stroke Datalogic, 2/5 3-stroke Matrix, Codabar, PDF 417, Royalbar, Planet, Jetcaps (HP/SAP), Code 39, 128 MSI, UPC A, E, Postnet, KIX, USPS One Code

Optional Barcodes

USD5, Aztec-Code, UPS-Maxicode, Datamatrix (more barcodes on request)

Additional functions

Intelligent barcode generation	on-the-fly in the printer
Format splitting	in several subformats by command
Ribbon Save Mode	active from 12 mm unprinted length, to save ribbon

Optional functions

Integrated form management

up to 12 MB flash for forms and fonts inside the printer

Status-Out

gives notice of each correctly printed page via interface


SPS-Control (EMBEDDED INTELLIGENCE - Enabling two-way communication between printer and a PLC)

integration of the printer into production lines is possible, controlled by SPS-interface.



Printable Media

Size	100 - 254 mm width: printable width 213 mm
Weight	max. 240 g/m ²
Paper thickness	0.2 - 0.9 mm
Thermal transfer ribbon	roll diameter max. 90 mm
Core diameter	1 inch (25.4 mm)
Ribbon length	max. 600 m
Coated side	inside
Ribbon width	30 - 217 mm

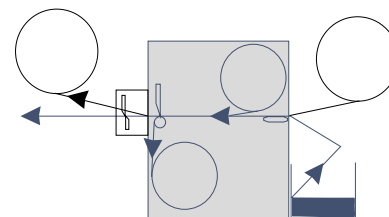

Paper Path

Input

Continuous
internal from roll, external, e.g. fanfold

Output

Single / Job tear-off

Optional

Continuous externer Rewinder
Single peel-off, cutter
 (up to 160 g/m²)
Job cutter (up to 160 g/m²)

The brand names referred to are the registered trademarks of the respective companies. All figures and details in italics and highlighted in color are optional. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 08.05.2017

Microplex Printware AG
Panzerstraße 5 | 26316 Varel | Germany
phone +49 4451 91 37-0 | fax +49 4451 91 37-49

